

STACKABLE STORAGE & DISPENSING SYSTEMS





INDUSTRY APPLICATIONS

Eliminate the hassle of handling messy 55 gallon drums or bulky steel tanks in your liquid storage area. Rhino Tuff Tanks systems will help transform your area into a cleaner, more efficient work space by allowing multiple fluids to be stacked vertically.

Rhino Tuff Tanks are constructed from virgin High Density Polyethylene (HDPE) for optimum surface clarity, UV stabilization, and superior environmental stress crack resistance (ESCR). They are designed for use with polyethylene tolerant fluids and accessories.

Examples of specific uses for Rhino Tuff Tanks include, but are not limited to:

AUTOMOTIVE	FARM / RANCH / AGRICULTURAL			
Antifreeze	Chemicals			
Lubricants	Herbicides			
Transmission Fluids	Liquid Feed			
Washer Fluids	Pesticides			
Synthetic Oils	Non-Potable Water			

CHEMICAL

AdhesivesODetergentsDDyesDSyrupsDOther Food Grade LiquidsD

INDUSTRIAL

Cutting Fluids Degreasers Detergents Hydraulic Fluids Lubricants



Rhino Tuff Tanks systems have been certified to be in compliance with UL-2152 Nonmetallic Bulk Containers for the Storage and Dispensing of Combustible and Non-combustible Liquids. Please contact Rhino Tuff Tanks, LLC for further certification information.

Resins used in the construction of Rhino Tuff Tanks are listed with the NSF as meeting the NSF 51 requirements and meet or exceed specifications contained in FDA Regulation 21 CFR 177.1520 (2) 3.1 and may be used as an article or as a component of articles for use in contact with food, subject to any limitations of the regulations.

Any use of Rhino Tuff Tanks with incompatible fluids, sealants, hoses, fittings, valves or any other incompatible accessories may cause a tank failure and will immediately void any and all manufacturer's warranty associated with the product(s) supplied by Rhino Tuff Tanks, LLC.


















WHIP YOUR SHOP INTO SHAPE

Rhino Tuff Tanks stackable tank systems eliminate the hassles of handling 55 gallon drums. Organize your bulk fluid inventory and maximize valuable floor space by stacking multiple fluids vertically. Available in a variety of tank sizes, combinations and packages all Rhino Tuff Tanks are designed with a 36" footprint that allows them to be stacked in any combination without needing conversion brackets. Combine with an array of accessories to create your own unique storage and dispensing system. Systems have been certified as compliant with UL-2152 testing standards and bear the markings as such. Superior tank design, tough RotoMolded construction and heavy duty components, Rhino Tuff Tanks offer you the Total Tank Package!

For over 17 years, Rhino Tuff Tanks has been a manufacturer of premium rotationally-molded stackable tanks and fluid handling equipment. Today we operate out of more than 285,000 sq ft of manufacturing and warehouse facilities in beautiful Maple Lake, MN. We take pride in conducting business with integrity by holding ourselves accountable to you, our customer in all areas of value: quality, service and reliability. Striving to make our word more than just a promise, our mission is to be the stackable tank and fluid handling equipment brand of choice.





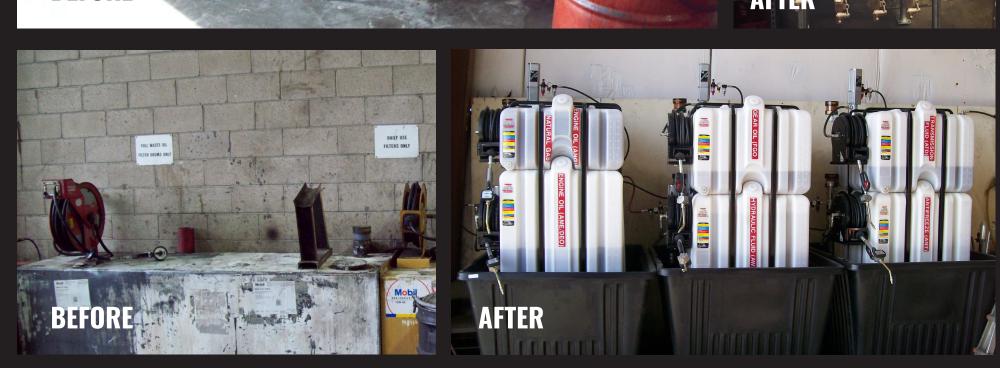



GRAVITY FEED TANK PACKAGES

Rhino Tuff Tanks offers several complete Gravity Feed Systems with one convenient model number. Gravity Feed Systems feature our stackable tanks for vertical fluid storage that maximizes your space and minimizes the fluid footprint

ALL PACKAGES INCLUDE:

- ROTO MOLDED STACKABLE TANKS
- ACCESSORY PACKAGE BARBED FITTINGS, BRAIDED TUBING, HOSE CLAMPS AND THREAD SEALANT
- RTT-2100 STAND KIT WITH 24" LEGS

- RTT-3200 DRIP TRAY KIT WITH 4 INSERT TRAYS AND SCREENS
- NO-VALVE SYSTEMS: VALVES ARE SOLD SEPARATELY TO ACCOMMODATE SPECIFIC NEEDS
- ALL SYSTEMS ASSEMBLED FOOTPRINT: 39"w x 45"d
- SYSTEMS CAN BE STACKED TO A MAXIMUM OF 360 GALLONS









- 1. Choose your tank(s) pg. 8
- 2. Choose your stand pg. 10
- 3. Choose an accessory package pg. 12

CAN'T FIND WHAT YOU NEED? BUILD YOUR PERFECT SYSTEM:

- 4. Choose your valves (above) 5. Add your drip tray pg. 11 (RTT-3200 500025)

OPTIONAL:

Add a secondary containment option pg. 11 Add vent caps pg. 12 Add the Ground Fill Kit pg. 14

Add the transfer jug pg. 11 Add a placard pg. 15 Add a cage Kit pg. 18

STACKABLE TANKS



Rhino Tuff Tanks space saving design allows individual tank sizes to be stacked in any combination and eliminates the hassles of handling 55 gallon drums. Stackable Tanks are designed with a 36" x 36" footprint that allows them the ability to be interchangeably stacked together with no conversion brackets required. All tanks are constructed of High Density Polyethylene (HDPE) for optimum surface clarity, UV stabilization and superior environmental stress crack resistance (ESCR). Rhino Tuff Tanks provide a clean, stable, contamination-free container that will not rust or corrode – protecting your fluids from the environment. Combine with an variety of accessory options to create your own unique fluid storage and dispensing system.

FEATURES:

- CONVENIENT 2" NPT CENTER FILL OPENING
- TWO 2" NPT CORNER TOP OPENINGS FOR PUMP OR VENT APPLICATION
- 1" SIDE OPENING FOR DESICCANT BREATHER OR REMOTE FILL
- MOLDED-IN METAL 5/16-18" INSERTS FOR MOUNTING ACCESSORIES
- VERTICAL RIB DESIGN TO MINIMIZE WALL DEFLECTION
- 2X MOLDED-IN #304 STAINLESS STEEL 1" NPT DRAIN BUSHINGS


- SEE EXACT FLUID LEVELS SEMI TRANSPARENT TANK WITH INTEGRATED VOLUME LEVEL INDICATORS
- INTERLOCKING TOP & BOTTOM RIDGES FOR SECURE STACKING
- SERIALIZED UL GRAPHIC, IDENTIFICATION LABEL AND WARNING LABEL



MODEL NO.	RTT-1010				
PART NO.	500216				
DESCRIPTION	45 Gallon Tank				
EMPTY WEIGHT	30 lbs.				
DIMENSIONS	36 " L x 36 " W x 10 " H				
HEIGHT INCLUDING FILL PORT	14" H				



MODEL NO.	RTT-1110
PART NO.	500146
DESCRIPTION	80 Gallon Tank
EMPTY WEIGHT	45 lbs.
DIMENSIONS	36 " L x 36 " W x 18" H
HEIGHT INCLUDING FILL PORT	22" H



MODEL NO.	RTT-1210				
PART NO.	500148				
DESCRIPTION	120 Gallon Tank				
EMPTY WEIGHT	65 lbs.				
DIMENSIONS	36 " L x 36 " W x 27" H				
HEIGHT INCLUDING FILL PORT	31" H				







MODEL NO.
PART NO.
DESCRIPTION
EMPTY WEIGHT
DIMENSIONS
HEIGHT INCLUDIN FILL PORT



STAND KITS & CONTAINMENT

STAND KITS

Heavy Duty welded Steel Stands are designed to specifically match RTT's contoured tank shape. Stand legs are constructed of 1-1/2" Diameter powder-coated schedule 80 pipe and easily accommodate bolt-on Drip Tray Kits. Welded foot flanges allow tank systems to be securely anchored to the floor. RTT-4000 Elbow Kits are easily attached to the front lip of the stand base, creating a convenient oil bar anchor at your fingertips.

MODEL NO.	PART NO.	DESCRIPTION
RTT-2000	500309	Stand Kit, 4" Legs With Foot Flange
RTT-2500	500310	Stand Kit, 18" Legs With Foot Flange
RTT-2100	500311	Stand Kit, 24" Legs With Foot Flange
RTT-2200	500312	Stand Kit, 36" Legs With Foot Flange
MODEL NO.	PART NO.	DESCRIPTION
RTT-2041-4	500615	4" Threaded Leg With Foot Flange - QTY 4
RTT-2041	500228	4" Threaded Leg With Foot Flange - QTY 1
RTT-2181-4	500616	18" Threaded Leg With Foot Flange - QTY 4
RTT-2181	500284	18" Threaded Leg With Foot Flange - QTY 1
RTT-2241-4	500592	24" Threaded Leg With Foot Flange - QTY 4
RTT-2241	500285	24" Threaded Leg With Foot Flange - QTY 1
RTT-2361-4	500592	36" Threaded Leg With Foot Flange - QTY 4
RTT-2361	500286	36" Threaded Leg With Foot Flange - QTY 1



Use in conjunction with any RTT Leg Kit or Caster Wheel Kit.








민생은

SCAN ME

EI	-4000 bow Ki lut for S	t with	4	-
12	-	-		EI C
11-	2		1	

DRIP & SPILL CONTAINMENT

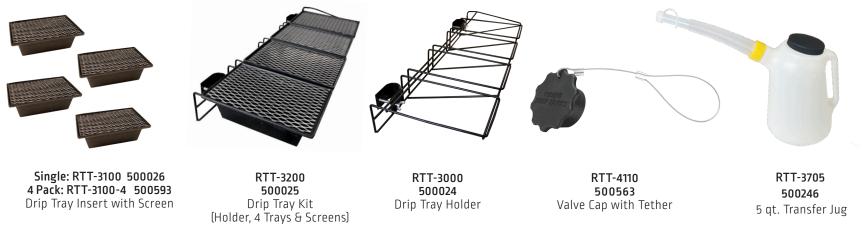

MODEL NO.	PART NO.	DESCRIPTION	OUTSIDE DIMENSIONS (TOP)	INSIDE FOOTPRINT	HEIGHT	EMPTY WEIGHT
RTT-4042	500289	Containment Vessel - 150 Gallon	50" L x 67-1/2" W	39" L x 55" W	15"	36 lbs.
RTT-4040	500014	Containment Vessel - 203 Gallon	48" L x 65" W	37" L x 57" W	20"	42 lbs.
RTT-4043	500290	Containment Vessel - 300 Gallon	56-1/2" L x 94" W	45" L x 82" W	16"	75 lbs.
RTT-4041	500015	Containment Vessel - 360 Gallon	56" L x 56" W	39" L x 39" W	42"	100 lbs.



SECONDARY CONTAINMENT

SPCC requires secondary containment vessels must be able to hold a minimum of 110% capacity of the largest primary tank within a stack or that of an individual primary tank.







RTT-4040 500014 Containment Vessel 203 Gallon

RTT-4043 500290 Containment Vessel 300 Gallon

RTT-4041 500015 Containment Vessel 360 Gallon RAVITY FEED PACKAGES

STACKA TANK

ACCESSORIES

GRAVITY FEED ACCESSORY PACKAGES

Our 2-Tank, 3-Tank and 4-Tank Gravity Feed Accessory Packages have everything you need in one box! Barbed Fittings, Braided Tubing, Hose Clamps, Thread Sealant. Valves are sold separately to best match your needs.

MODEL NO.	PART NO.	NUMBER OF TANKS	RTT-4009 500012 1" BRAIDED TUBING	RTT-4000 500484 STAINLESS STEEL ELBOW KIT FOR STAND	RTT-4033 500045 HOSE CLAMPS	RTT-4405 500524 STAINLESS STEEL 1" ELBOW	RTT-4131 500467 THREAD SEALANT
RTT-4092	500002	2	5 linear feet	1	2	1	1
RTT-4093	500003	3	9 linear feet	2	4	2	1
RTT-4094	500004	4	12 linear feet	3	6	3	1

TANK VENTING OPTIONS







VALVES & ADAPTERS









Brass Ball Valve 1" MXF Locking



RTT-4036-NL 500556 Brass Ball Valve 1" MXF Non-Locking



RTT-4528 500461 Hose .75" x 8ft - .75" Male Swivel End



RTT-4037 500236 Stainless Steel Ball Valve 1" FXF Locking

RTT-4003

500083 Polyethylene Elbow w/ Barbed End



RTT-4238 500086 Poly Ball Valve 1" FXF



RTT-4004 500084 Polyethylene Union w/ Barbed End



RTT-7044 500730 Stainless Steel Nozzle Holster



RTT-4060 500566 1" Street Elbow, Galvanized



RTT-4039 500299 Nipple Stainless Steel 1in x 2in MXM



RTT-4103 500041 Nipple 1 Steel Nipple Barb X Male



STAND KITS & CONTAINMENT


RAVITY FEED PACKAGES

STACKA

REMOTE FILL KITS

Access top fill opening from the ground - eliminate the need for a ladder to fill an elevated tank. Tank venting option and fill adapter sold separately.



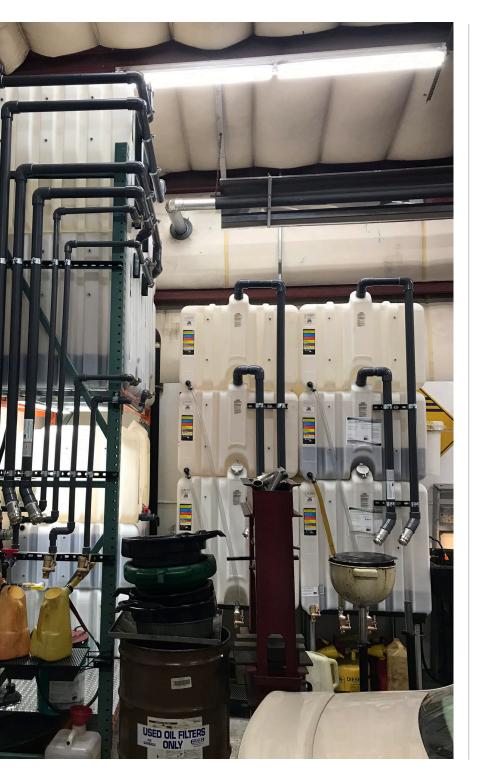

CUSTOM SYSTEM BRANDING

Brand your system with your company logo or for quick fluid identification.



RTT-4083 500317 4"x6" Blank Placard Assembly for Valve





RTT-4076 500689 18"x24" Blank Placard with Attachment Hardware



IRAVITY FEED PACKAGES

RHINO TUFF TANKS STACKABLE STORAGE & DISPENSING SYSTEMS

ADJUSTABLE CAGE KITS NEW! UPGRADED DESIGN!

Add seismic security to your tank system. Experience adjustability and effortless installation. Designed for convenience, this updated version ensures a streamlined site installation process without the need for any cutting or trimming. Secures the entire tank system to the stand base. Cages can be installed on new and existing systems. Vertical bars run between rib grooves and do not interfere with mounting plates. Additional caged combinations are available visit www.rhinotufftanks.com.

FEATURES:


- COLD STEEL CONSTRUCTION & CORROSION RESISTANT POWDER COAT FINISH
- PROVIDES STRUCTURAL SUPPORT FOR RTT STACKABLE TANKS
- INCREASED SEISMIC SECURITY FOR ENTIRE ENCOMPASSED TANK STACK
- PROVIDES ANCHOR POINT FOR TOP MOUNTED HOSE REEL INSTALLATION
- DOES NOT INTERFERE WITH SIDE MOUNTED PUMP INSTALLATION
- MODULAR SWEDGE DESIGN ALLOWS FOR CONTINUOUS SIDE BAR EXPANSION



			RTT-2980	RTT-2981	RTT-2982	RTT-2983	RTT-2983	RTT-2922	RTT-1034	RTT-2984	RTT-4199
COW	COMPONENTS INCLUDED IN EACH		500675	500679	500678	500687	500677	500676	500642	500681	500605
CAGE KIT:		ТОР НООР	12" ADJ INNER	12" ADJ OUTER	COLLAR S/B	13" BAR	22" BAR	SELF TAP	.25 X 1.5 PIN	CAGE CLAMP ADAPTER	
Model #	Part #	Configuration Description									
RTT-2905	500714	CAGE KIT ADJUSTABLE 80 TO 120 GAL	2	4	4	8	0	0	4	4	4
RTT-2910	500715	CAGE KIT ADJUSTABLE 140 TO 180 GAL	2	4	4	8	4	0	8	8	4
RTT-2915	500716	CAGE KIT ADJUSTABLE 180 TO 220 GAL	2	4	4	8	0	4	8	8	4
RTT-2920	500717	CAGE KIT ADJUSTABLE 200 TO 240 GAL	2	4	4	8	8	0	12	12	4
RTT-2925	500718	CAGE KIT ADJUSTABLE 240 TO 280 GAL	2	4	4	8	4	4	12	12	4
RTT-2930	500719	CAGE KIT ADJUSTABLE 270 TO 310 GAL	2	4	4	8	0	8	12	12	4
RTT-2935	500720	CAGE KIT ADJUSTABLE 310 TO 350 GAL	2	4	4	8	8	4	16	16	4
RTT-2940	500721	CAGE KIT ADJUSTABLE 350 TO 390 GAL	2	4	4	8	4	8	16	16	4
RTT-2945	500722	CAGE KIT ADJUSTABLE 370 TO 410 GAL	2	4	4	8	12	4	20	20	4
RTT-2950	500723	CAGE KIT ADJUSTABLE 400 TO 440 GAL	2	4	4	8	0	12	16	16	4
RTT-2955	500724	CAGE KIT ADJUSTABLE 420 TO 460 GAL	2	4	4	8	8	8	20	20	4
RTT-2960	500725	CAGE KIT ADJUSTABLE 440 TO 480 GAL	2	4	4	8	4	12	20	20	4



CAGE KITS ARE DETERMINED BY THE TOTAL VOLUME OF A TANK STACK

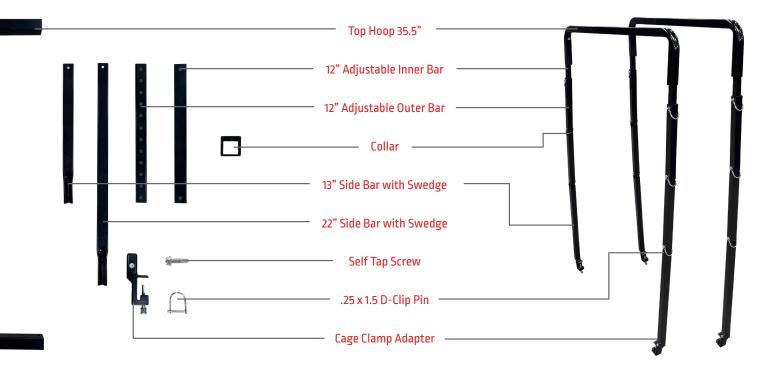



MOBILE PACKAGES

Portable Dispensing Systems keep fluids organized for quick dispensing and easily brings the fluids to your equipment. Heavy duty caster wheels have a load capacity of 3,960 lbs. Available in 45, 80, 120 and 180 gallon fully outfitted packages.

ALL SYSTEMS INCLUDE:

- TANK WITH VERTICAL CAGE/BASE
- 8" X 2" CASTER WHEEL KIT 2 RIGID & 2 SWIVEL WITH BRAKE (3960 LB LOAD CAPACITY)
- 3:1 PUMP WITH AIR FILTER REGULATOR
- 1/2" X 50' HOSE REEL
- ELECTRONIC NON-PRESET DISPENSING METER
- 2-WAY BREATHER CAP



80 GAL MOBILE CART

MODEL NO.	RTT-7102			
PART NO. 500643				
DESCRIPTION	80 Gal Mobile Cart, Side Mount Pump			
DIMENSIONS	36" L x 47" W x 33" H			
WEIGHT	243 lbs.			



120 GAL MOBILE CART

MODEL NO.	RTT-7202			
PART NO.	500644			
DESCRIPTION	120 Gal Mobile Cart, Side Mount Pump			
DIMENSIONS	36" L x 47" W x 42" H			
WEIGHT	257 lbs.			



180 GAL MOBILE CART

MODEL NO.	RTT-7302
PART NO.	500645
DESCRIPTION	180 Gal Mobile Cart, Side Mount Pump
DIMENSIONS	36" L x 47" W x 54" H
WEIGHT	300 lbs.






NEW! FLUID TRANSFER CART 45 GAL

MODEL NO.	RTT-7445
PART NO.	500729
DESCRIPTION	Fluid Transfer Cart 45 Gal, Diaphragm Pump
DIMENSIONS	40.5" L x 26" W x 50" H"
WEIGHT	160 lbs.



45 GAL MOBILE CART

MODEL NO.	RTT-7452
PART NO.	500650
DESCRIPTION	45 Gal Mobile Cart, Top Mount Pump
DIMENSIONS	36" L x 19" W x 55" H
WEIGHT	228 lbs.

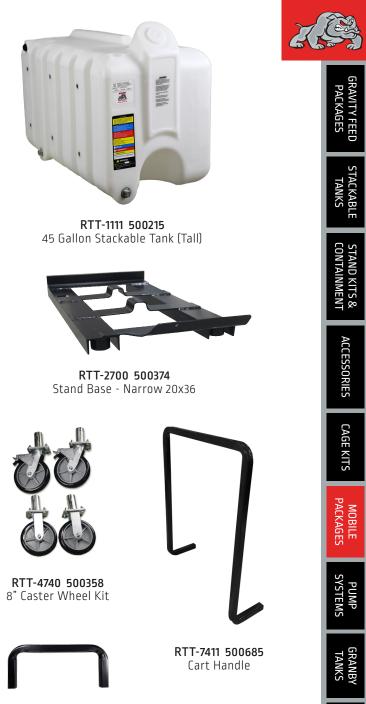

RTT-2979 500680 Cage Top Hoop 17.75"

19

PISTON PUMP ASSEMBLY

Pump Systems provide versatile options for clean, convenient and accurate dispensing from the tank, directly to your equipment. Side mount systems are compatible with Rhino Tuff's stackable tanks.

1. PICK A BASE PACKAGE



All base packages come with RTT-4011 500419

RTT-4025 500081 Side Mount Plate with Hardware

RTT-4035 500087 Universal Piston Pump Bracket 1/2" Hydaraulic Elbow M/F

RTT-4038 500063 Universal Hose Reel Bracket

RTT-4115 500089 1" Pump Inlet Kit

RTT-4112 500048 1/2 x 2' Hose

RTT-4030 500235 Poly Elbow 1" F/F

Hose

Hose Reel and 1/2 x 50'

RTT-5122 500049

RTT-5123 500454

1/2" Hydraulic Elbow F/F

RTT-4020 500085 Poly Coupler 1"

RTT-4011 500117 RTT-5124 500674 Desiccant Air Breather/Filter 1" 1/2" Extension Adapter

LD SERIES includes: RTT-4015 500009 Air regulator 1/4" RTT-4056 500050 Nipple Brass 1/4"

FIREBALL SERIES RTT-4385 500418 Air regulator 3/8" RTT-4058 500557 Nipple Brass 3/8" RTT-4063 500053 Heavy Duty Bung Adapter 2" RTT-5121 500431 Reducer Bushing 1-1/2" x 1"



2. PICK A PUMP OPTION

RTT-4018 500425 LD Series Pump, 3:1 **RTT-4019 500426** LD Series Pump, 5:1



RTT-4077 500417 Mini Fire-Ball® Pump, 3:1





SCAN ME





MODEL NO.	F
RTT-4006	
RTT-4007	
RTT-4106	
RTT-4107	
RTT-4108	

MODEL NO.	PART NO.	BASE PACKAGE OPTIONS		MODEL NO.	PART NO.	PUMP OPTIONS			
DTT 1212 NO	RTT-1212-NO 500740 PUMP PACKAGE SIDE MOUNT LD SERIES (NO PUMP/ NO METER)		RTT-4018	500425	PUMP 3:1 LD SERIES W/BUNG ADAPTER GRACO				
RTT-1212-NU		(NO PUMP/ NO METER)		RTT-4019	500426	PUMP 5:1 LD SERIES W/BUNG ADAPTER GRACO			
	PUMP PACKAGE SIDE MOUNT FIREBALL SER		PUMP PACKAGE SIDE MOUNT FIREBALL SERIES	RTT-4077	500417	PUMP 3:1 FIREBALL 225 GRACO (BUNG ADAPTER NOT INCLUDED)			
RTT-1912-NO	500741	(NO PUMP/ NO METER)		RTT-4188	500481	PUMP 5:1 FIREBALL 300 GRACO (BUNG ADAPTER NOT INCLUDED)			

3. PICK A METER OPTION

RTT-4006 500421 Electronic Non-Preset Dispensing Meter EM-8 Series


RTT-4007 500422 Electronic Preset Dispensing Meter LD Series

RTT-4106 500423 Electronic Non-Preset Dispensing Meter SD Series

RTT-4107 500420 Electronic Preset Dispensing Meter SD Series

RTT-4108 500462 Non-Metered Valve SD Series

PART NO.	PUMP OPTIONS
500421	METER NON PRESET ELECTRONIC GRACO (EM-8)
500422	METER PRESET ELECRTONIC GRACO (LD)
500423	METER NON PRESET ELECTRONIC HD GRACO (SD)
500420	METER PRESET ELECTRONIC HD GRACO (SD)
500462	NON-METERED VALVE SD GRACO
500462	NON-METERED VALVE SD GRACO

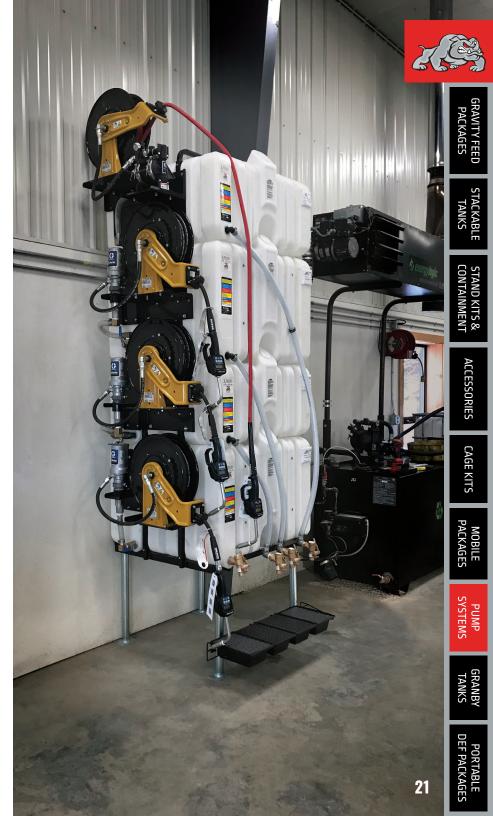


DIAPHRAGM PUMP ASSEMBLY

Pump Systems provide versatile options for clean, convenient and accurate dispensing from the tank, directly to your equipment. Side mount systems are compatible with Rhino Tuff's stackable tanks.

1. BASE PACKAGE





Side Mount Plate with Hose Reel and 1/2 x 50' Hose

500191 RTT-4055 Diaphragm Pump Bracket

RTT-4038 500063 Universal Hose Reel Bracket

RTT-4115 500089 1" Pump Inlet Kit

Hardware

RTT-4112 500048 1/2 x 2' Hose

RTT-4011 500117 Desiccant Air Breather/Filter 1"

3/4 x 1" Barb RTT-4015 500009 Air Regulator 1/4"

> RTT-4056 500050 Nipple Brass 1/4"

RTT-5122 500049

RTT-5123 500454

RTT-4106 500056

3/4 x 1/2 Reducer

RTT-4134 500457

Elbow Adapter

1/2" Hydaraulic Elbow M/F

1/2" Hydraulic Elbow F/F



RTT-4079 500427 3/4" Diaphragm Pump









RTT-4006 500421 Electronic Non-Preset Dispensing Meter EM-8 Series

RTT-4007 500422 Electronic Preset Dispensing Meter LD Series

RTT-4106 500423 Electronic Non-Preset Dispensing Meter SD Series

RTT-4107 500420 Electronic Preset Dispensing Meter SD Series

RTT-4108 500462 Non-Metered Valve SD Series



MODEL NO.	PART NO.	PUMP OPTIONS
RTT-4006	500421	METER NON PRESET ELECTRONIC GRACO (EM-8)
RTT-4007	500422	METER PRESET ELECRTONIC GRACO (LD)
RTT-4106	500423	METER NON PRESET ELECTRONIC HD GRACO (SD)
RTT-4107	500420	METER PRESET ELECTRONIC HD GRACO (SD)
RTT-4108	500462	NON-METERED VALVE SD GRACO





PUMP SYSTEM ACCESSORIES





PUMP SYSTEM ACCESSORIES



(È

iravity feed Packages

STACKABLE TANKS

STAND KITS & CONTAINMENT

FLUID OUTLET DISPENSING METERS SCAN ME RTT-4014 500059 1/2" x 6' hose RTT-4011 500419 Hose Reel RTT-4006 500421 RTT-4007 500422 1/2"x50"ft Hose Electronic Non-Preset **Electronic Preset Dispensing Meter** Dispensing Meter ÉM-8 Series LD Series RTT-4112 RTT-4013 500048 500058 1/2" x 2' hose 1/2" x 15' hose RTT-5134 RTT-5124 RTT-5122 500456 500674 500049 Bushing Reducer 1 Adapter Ext. 1/2 x 1/2 HDWR 1/2 90 Deg x 3/4" Zinc Steel F/F Swivel RTT-4106 500423 RTT-4107 500420 Electronic Preset Electronic Manual Dispensing Meter **Dispensing Meter** SD Series SD Series RTT-5123 RTT-4500 RTT-4505 500454 500090 500429 Elbow 1/2 90 Deg Manual Barrel Pump Oil Bar 1-3 Position F/F Swivel Graco RTT-4108 500462 Non-Metered Valve SD Series RTT-4515 500242 1/4" Water Bib Trigger Nozzle

25



the top mount bracket kit. **FEATURES**:

- UL-2258 AND ULC-S670 CERTIFICATIONS

- PROTECTION ALARM
- OIL LEVEL GAUGE
- OIL BURNER SUPPLY DUPLEX BUSHING WITH TUBE ADAPTERS

MODEL NO.	PART NO.	DESCRIPTION	DIMENSIONS	WEIGHT
RTT-1190	500731	190 Gal Double Wall Granby Tank	43.125" l x 27.5" w x 46.25" h	150 lbs.
RTT-1265	500732	265 Gal Double Wall Granby Tank	43.125" l x 27.5" w x 62" h	185 lbs.

GRANBY TANKS NEW!

Granby tanks provide a double wall solution for lubricants, waste oil, washer fluid, ATF, heating oil and diesel blends up to B100. Constructed of a fluorinated internal HDPE tank and galvanized steel external tank with sturdy integrated galvanized base, these units optimize tight space utilization. With two tank sizes available, both are suited for areas with headroom as low as 60" and doorways as narrow as 28" wide. Easily add fluid fill and dispensing equipment with

- PRIMARY TANK WITH GALVANIZED STEEL SECONDARY CONTAINMENT
- VISUAL LEAK INDICATOR FOR THE MONITORING OF THE INTEGRITY OF THE PRIMARY TANK
- FLUORINATION TREATED AGAINST OIL ODORS, **EXCLUSIVE TO GRANBY 2-IN-1 TANKS**
- CONNECTION FITTINGS MADE OF CAST ALUMINUM FOR GREATER TOROUE RESISTANCE AND GREATER PERIPHERAL SEALING
- 30 YEAR LIMITED WARRANTY

ACCESSORIES INCLUDED:

- 2" NPT GALVANIZED STEEL FILL PIPE ADAPTER - LOW PRESSURE VENT AND OVERFILL





PORTABLE DEF PACKAGES



Transport and dispense fluids, including DEF and a wide variety of other chemicals safely within a closed system unit. Dispensing equipment is protected from environmental conditions inside compartment with lockable hinged lid.

BARE TANK PACKAGES INCLUDE:

- LOCKABLE HINGED LID FOR SECURITY
- MOLDED-IN TIE DOWN CORNERS FOR SECURE TRANSPORT
- SEMI-TRANSPARENT TANK WITH INTEGRATED VOLUME LEVEL INDICATORS FOR SEEING EXACT FLUID LEVELS
- TWO 2" NPT OPENINGS
- FOUR 1/4 20 SS INSERTS FOR PUMP MOUNT
- 7.5" CLEARANCE FOR PUMP

PORTABLE DEF BARE TANK ASSEMBLY WITH LID (NO PUMP SYSTEM)

MODEL NO.	PART NO.	DESCRIPTION	DIMENSIONS	WEIGHT
RTT-7580	500298	80 Gallon DEF Tank/Lid	36" L x 36" W x 27" H	97 lbs.
RTT-7620	500294	120 Gallon DEF Tank/Lid	36" L x 36" W x 36" H	117 lbs.
RTT-7730	500367	180 Gallon DEF Tank/Lid	36" L x 36" W x 45" H	167 lbs.



DEF Pump 120 VAC (7-9 GPM)

<u></u> (I) SCAN ME

- DEF PUMP (7-9 GPM)

	MODEL NO.
	RTT-7080-DC
	RTT-7120-DC
	RTT-7180-DC

DEF 12 VDC AND 120 VAC PUMPS

Built with an electric motor, auto-shutoff timer and no need for dynamic seal which has created a reliable industrial pump with self-priming capabilities. 3/4" hose tail connection, On/Off Switch, 6 foot cable with socket and 20 minute duty cycle.



RTT-7101 500324 DEF Pump 12 VDC (7-9 GPM)

RTT-7620 500394 120 Gallon

PORTABLE DEF SYSTEM WITH 120V AC PUMP WITH POWER CO

MODEL NO.
RTT-7080-AC
RTT-7120-AC

RTT-7180-AC

PORTABLE DEF PACKAGES

Complete systems available, fully-outfitted with approved DEF dispensing equipment. Inlet and outlet openings are secured with tamper-evident seals.

PACKAGES WITH PUMP INCLUDE:

- ALL BARE TANK PACKAGE FEATURES
- SS AUTOMATED SHUT-OFF NOZZLE WITH SWIVEL AND NOZZLE SUPPORT
- SS RSV INLET AND OUTLET VALVE WITH TAMPER EVIDENT ZIP TIE
- 3/4" X 20' DISPENSING HOSE



PORTABLE DEF SYSTEM WITH 12V DC PUN

PART NO.	DESCRIPTION	DIMENSIONS	WEIGHT
500333	80 Gallon Portable DEF System 12V DC Pump	36" L x 36" W x 27" H	127 lbs.
500334	120 Gallon Portable DEF System 12V DC Pump	36" L x 36" W x 36" H	147 lbs.
500398	180 Gallon Portable DEF System 12V DC Pump	36" L x 36" W x 48" H	197 lbs.



PART NO.	DESCRIPTION	DIMENSIONS	WEIGHT
500602	80 Gallon Portable DEF System 120V AC Pump with Power Cord	36" L x 36" W x 27" H	127 lbs.
500603	120 Gallon Portable DEF System 120V AC Pump with Power Cord	36" L x 36" W x 36" H	147 lbs.
500604	180 Gallon Portable DEF System 120V AC Pump with Power Cord	36" L x 36" W x 48" H	197 lbs.





TUFF TANK JACKET NEW!

The NEW! TUFF TANK JACKET provides rugged, yet flexible and lightweight protection for the contents contained within the RTT Portable DEF tanks against extreme temperature changes and UV exposure.

FEATURES:

Thermal Retention

- Keeps tank contents protected from harmful uv rays
- Outer shell marine grade Sunbrella fabric oil and stain resistant
- Insulation (Thinsulate) liner provides thermal protection in both hot and cold seasons
- Integrated lid cover for full enclosure
- Lightweight, flexiable and compact

Easy to Install

- See-through site gauge for fluid level visibility
- 4-way securing mechanisms: Snap, Strap, Bolt, Hook & Loop

Internal Heating Elements

- Dual affixed heating elements with direct-tank contact
- Multi-point sensors to ensure reliability of fluid temperature
- Built-in fixed controller to regulate heating elements

Heating Element Specs: 120 VAC, 500 Watts, 4.6 Amp







Z CO **DEF SYSTEM COMPONENTS & ACCESSORIES** RAVITY FEED PACKAGES SCAN ME RTT-7020 500327 DEF Dispensing Hose 3/4" (sold in linear foot increments) RTT-7001 500320 Poly RSV Valve RTT-7750 500373 DEF Hose Reel 3/4" RTT-7200 500326 RTT-7040 500331 2.5" Buttress RTT-7025 500328 SS Nozzle with Automatic x 50 ft. Nozzle Support and Downtube DEF Suction Hose 3/4" Shut-Off (cut to length) (sold in linear foot increments RTT-0316 500370 Hose Clamp 1 Ear 31.6 MM Stainless Steel RTT-7030 500329 RTT-7010 500322 RTT-0286 500369 RTT-7015 500325 Poly Dispense Coupler RTT-7715 500323 Side Mount DEF System 120V AC Pump Hose Clamp 1 Ear 28.6 MM DEF K24 In-Line Meter Poly Elbow 3/4" Barb x 1" Stainless Steel Female BSP RTT-4444 500225 4-Way Fork Lift Pallet 40-3/8"L x 40-3/8"W x 10"H RTT-7252 500609 RTT-7002 500655 RTT-7005 500321 Adds 6" to Overall ADAPTER DEF 2.5" FB RSV Valve 2" NPT Tamper Evident Zip System Height X 2" MNPT POLY 31 Tie (Serialized)







RTT-7820 500727 Tuff Tank Jacket with Heating Element 120 Gal

DEF Tank and Forklift Pallet SOLD SEPARATELY



For Sales, Product or Pricing Information: call 630-527-9933 email rhinotuff@walshlong.com

WWW.RHINOTUFFTANKS.COM

411 West Congress Street, Maple Lake, MN 55358 877-RU-TUFF-2 (877-788-8332) ©COPYRIGHT 2024 RHINO, LLC ALL RIGHTS RESERVED

